




## RedMAX Subscriber Unit (SU-O)

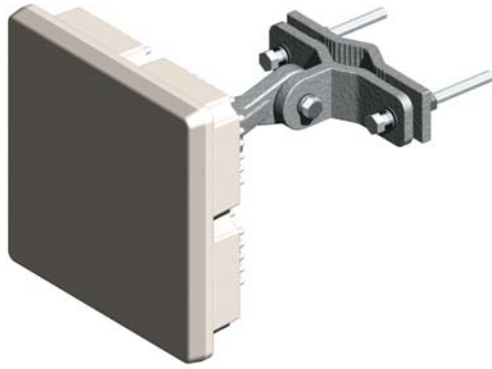

### Features:

- WiMAX Forum Certified™ design
- Intel® PRO/Wireless 5116
- Simple, quick and economical installation
- Non-LOS PMP capability employing OFDM technology for high reliability
- Dynamic Quality of Service (QoS) settings
- 3.4 - 3.6 GHz frequency band

The RedMAX SU-O is an outdoor broadband wireless subscriber access product designed to WiMAX Forum Certified™ specifications. Compliance to the IEEE 802.16-2004 standard ensures its interoperability (as defined by the WiMAX Forum™) with an emerging industry-wide base of compatible Point to Multipoint (PMP) equipment.

The RedMAX SU-O system is easy and economical to deploy, allowing service providers to quickly provision new services with bandwidth comparable to xDSL. This outdoor unit, with fully integrated flat panel antenna, or optional external antenna, includes an audible installation tool for quick and simple alignment. The indoor Power-over-Ethernet (PoE) adaptor provides power for the outdoor unit and the user's Ethernet network access port.

Operating in the 3.4 - 3.6 GHz band, Redline's built-in 3<sup>rd</sup> generation, Orthogonal Frequency Division Multiplexing (OFDM) non Line of Sight (NLOS) technology helps overcome typical urban obstacles such as trees and buildings while maintaining high reliability. Rugged design standards and sophisticated techniques, including advanced forward error correction (FEC), combine to deliver wireline-equivalent high availability.

The very low latency of Redline's RedMAX SU-O ensures reliable delivery of delay sensitive mission critical services such as circuit-switched voice traffic, video, voice-over-IP (VoIP), and prioritized data traffic. WiMAX-based compatibility, high performance, and easy installation all combine to make the RedMAX SU-O an excellent choice when deploying wireless broadband for business and residential PMP access.

## RedMAX Subscriber Unit (SU-O)

System Capability:	LOS, Optical LOS, non-LOS Cell-based Point-to-Multipoint
RF Band:	3.400 GHz to 3.600 GHz (FWA Band)
Channel Size:	3.5 MHz, 7 MHz
Spectral Efficiency:	Up to 5 bps/Hz (over the air) Up to 3 bps/Hz (net to Ethernet)
Over The Air Rate:	Up to 35 Mbps (@7 MHz, rates depend on channel size)
Data Rate:	Up to 23 Mbps Maximum Ethernet rate (@7 MHz)
Maximum Tx Power:	Up to +20 dBm (region specific)
Rx Sensitivity:	Better than -90 dBm @ BPSK 1/2 (based on BER of 1x10e-6)
Cable:	Maximum length up to 328 ft (100 m) using Redline recommended shielded outdoor cable
Network Attributes:	Transparent bridge 802.1Q VLAN 802.1p, TOS/DSCP and L2/L3 address traffic prioritization DHCP client and DHCP pass-through
Modulation/Coding Rates:	Dynamic adaptive modulation (bi-directional) Auto select: BPSK, QPSK, 16 QAM, 64 QAM
Coding Rates:	1/2, 3/4 and 2/3
Over the Air Encryption:	DES and AES
MAC:	Cell-based PMP deployment 802.16-2004 compliant PMP 802.16-2004 packet convergence sub-layer mode TDMA access
Range:	Automatic repeat request (ARQ) error correction Over 19 mi (30 km) LOS Over 1.5 mi (2.5 km) non-LOS
Duplex Technique:	TDD (time division duplex) HD-FDD (Half Duplex Frequency Division Duplex)
Wireless Transmission (PHY):	256 FFT Orthogonal Frequency Division Multiplexing (OFDM)
System Configuration:	HTTP (Web) interface, SNMP, TFTP
Network Management:	SNMP, standard and proprietary MIBs Full management by RedAccess NMS
Power Requirements:	Standard IEEE 802.3af PoE
Available Power Blocks:	Auto-sensing 110/220/240 VAC 50/60 Hz
Compliance:	EN 35022, FCC part 15 subpart B, EN 53024, EN 301 021, EN 301 489, UL 950, IEC 60950 Lightning IEC 61000-4-5 class 3 (2KV), ITU-T K.21
Operating Temperature:	-40 C to 65 C
Antenna:	Integrated flat panel and optional non integrated high gain (18 dBi)

### Interface Options\*

#### Ethernet Option

Standard:	10/100 Ethernet (RJ-45)
Optional:	4 port mini switch

#### TDM Option

General	
Ports:	One full rate E1 or T1 Supports fractional nx64 services
Round-Trip-Delay:	Under 50 ms
Line Length:	6562 ft (2000 m) using 22 AWG twisted pair cable
Clocking:	Internal, network, adaptive
Diagnostics:	Local, remote and traffic loopback testing Detects LOS, OOF, AIS, RAI Generates AIS, RAI

#### E1 Interface

Connector:	RJ-48c
Data Rate:	2.048 Mbps
Framing:	Unframed, PCM 31
Jitter:	ITU-T G.823
Line Code:	AMI, HDB3
Line Impedance:	Balanced 120 ohm
Line Build Out:	n/a

#### T1 Interface

Connector:	RJ-48c
Data Rate:	1.544 Mbps
Framing:	Unframed, D4 (SF), ESF
Jitter:	AT&T TR-62411, ITU-T G.824
Line Code:	AMI, B8Z5
Line Impedance:	Balanced 100 ohm
Line Build Out:	0 dB, -7.5 dB, -15 dB, -22.5 dB
Standards:	ANSI T1.403, ITU-T Rec. G.703, G.704, G.733, G.821, G.826

Standards:	ETS TBR 12/13, ITU-T Rec., G.703, G.704, G.706, G.732, G.821, G.826
------------	---

#### Voice Interface Options

VoIP	SIP
POTS	1 to 4 FXO/FXS

\*contact sales for availability



## About Redline Communications

Redline Communications is a technology leader in the design and manufacture of standards-based broadband wireless access solutions. Using industry leading OFDM technologies, Redline's award-winning products provide unmatched high-capacity non line-of-sight capabilities with proven performance, reliability and security. Ideal for a variety of access, backhaul and private network applications, Redline products are meeting the needs of carriers, service providers and enterprises worldwide. Redline has over 15,000 installations in 75 countries across six continents through a global distribution network of 80+ partners.